

Tech Specs

UniFi UISP Branding

UniFi Cloud Gateways

WiFi

Switching

Cloud Keys & Gateways

Camera Security

Door Access

Phone System

New Integrations


Accessories

Camera Security / Network Video Recorder

Datasheet

Installation Guide

Marketing Images

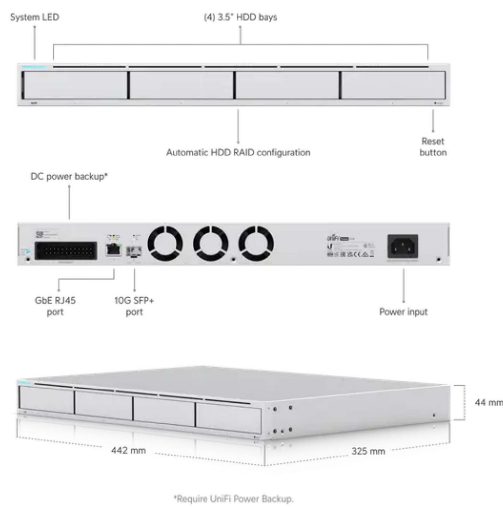

Mechanical

Dimensions 442.4 x 325 x 43.7 mm (17.4 x 12.8 x 1.7")

Weight Without mounting brackets: 5.1 kg (11.3 lb)
With mounting brackets: 5.2 kg (11.5 lb)

Enclosure material SGCC steel

Mount material SGCC steel

Hardware

Management interface Ethernet In-Band

Networking interface (1) GbE RJ45 port
(1) 1/10 GbE SFP+ port

Power method (1) Universal AC input, 100—240V AC, 2A Max., 50/60 Hz
(1) USP-RPS DC input, 11.5V DC, 10.43A

Power supply AC/DC, internal, 120W

Supported voltage range 100—240V AC

Max. power consumption 100W

Max. power budget for Drives 75W


ESD/EMP protection Air: ± 12kV, contact: ± 8kV

Operating temperature	-5 to 40° C (23 to 104° F)
Operating humidity	5 to 95% noncondensing
Certifications	FCC, CE, IC

LEDs

System	(1) Power: blue/white Flashing white: bootup in progress Flashing blue: firmware upgrading Steady white: factory defaults, awaiting adoption Steady blue: device is adopted
Ethernet	Green: 1 Gbps Amber: 10/100 Mbps
SFP+	White: 10 Gbps Green: 1 Gbps
HDD	White: disk detected Amber: disk error
RPS	Blue: ready

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.