

# Tech Specs

UniFi UISP Branding


UniFi Cloud Gateways    WiFi    Switching    Cloud Keys & Gateways    Camera Security    Door Access    Phone System    New Integrations    Accessories

## Camera Security / Network Video Recorder Professional

Datasheet

Installation Guide

Marketing Images

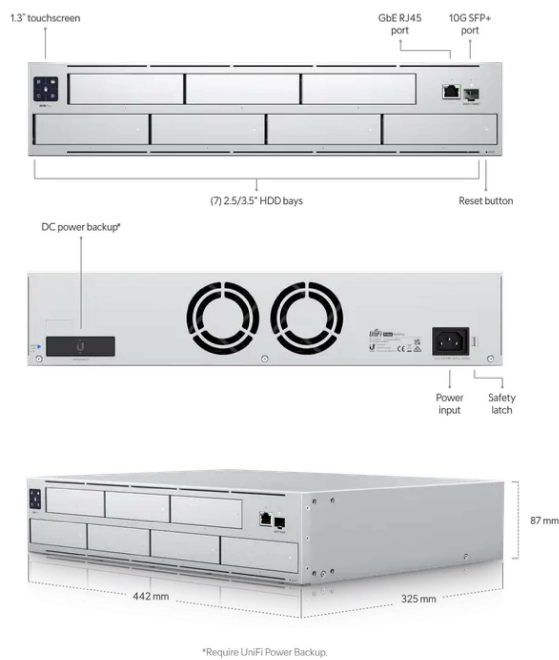

### Mechanical

<b>Dimensions</b>	442 x 325 x 87 mm (17.4 x 12.8 x 3.4")
<b>Weight</b>	Without mounting brackets: 9.2 kg (20.3 lb) With mounting brackets: 9.5 kg (20.8 lb)
<b>Enclosure material</b>	SGCC steel
<b>Mount material</b>	SGCC steel

### Hardware

<b>Management interface</b>	Ethernet In-Band
<b>Networking interface</b>	(1) GbE RJ45 port (1) 1/10 GbE SFP+ port
<b>RF interface</b>	Bluetooth 4.1
<b>Power method</b>	(1) Universal AC input, 100—240V AC, 3A Max., 50/60 Hz (1) USP-RPS DC input, 11.5V DC, 13.91A
<b>Power supply</b>	AC/DC, internal, 200W

Supported voltage range	100—240V AC
Max. power consumption	160W
Max. power budget for Drives	135W
ESD/EMP protection	Air: ± 12kV, contact: ± 8kV
LCM display	(1) 1.3" touchscreen
Operating temperature	-5 to 40° C (23 to 104° F)
Operating humidity	5 to 95% noncondensing
Certifications	FCC, CE, IC

---

## LEDs

System	(1) Power: blue/white Flashing white: bootup in progress Flashing blue: firmware upgrading Steady white: factory defaults, awaiting adoption Steady blue: device is adopted
Ethernet	Green: 1 Gbps Amber: 10/100 Mbps
SFP+	White: 10 Gbps Green: 1 Gbps
HDD	White: disk detected Amber: disk error
RPS	Blue: ready

## Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.