


- UniFi Cloud Gateways
- WiFi
- Switching
- Cloud Keys & Gateways
- Camera Security
- Door Access
- Phone System
- New Integrations
- Accessories

Door Access / Access Hub

Datasheet

Installation Guide

Marketing Images

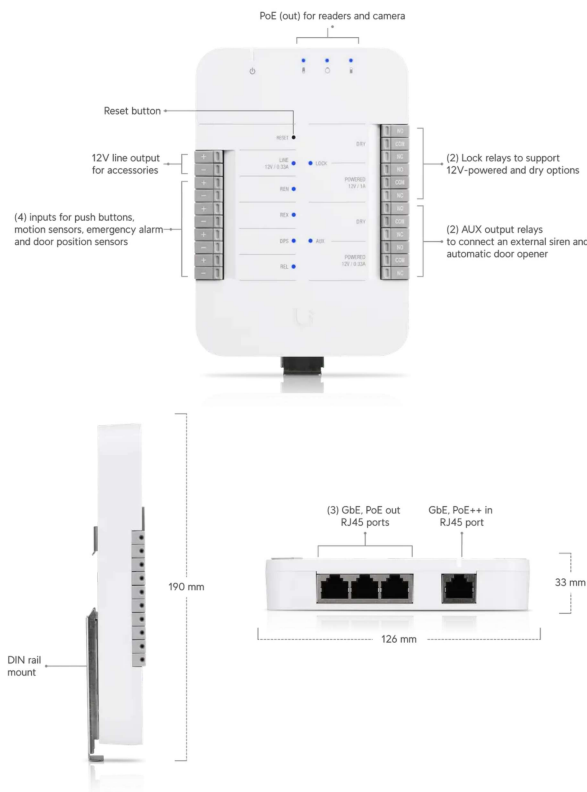

Mechanical

Dimensions	190 x 126 x 30.5 mm (7.48 x 4.96 x 1.2")
Weight	457 g (16.12 oz)
Enclosure material	Plastic Enclosure with Metal Mount Plate
Mounting options	DIN rail

Hardware

Networking interface	(4) 1GbE
Max. power consumption	51W
Power method	PoE++
Input terminals	REX - request to exit REN - request to enter

REL - remote release
DPS - door position sensor

Dry output relay

Lock Rated 30VDC, up to 1A
Aux Rated 30VDC, up to 1A

Powered output relay

Lock 12VDC, up to 1A
Aux 12VDC, up to 0.33A
Line 12VDC, up to 0.33A

LEDs (1) System, (3) PoE out, (4) Input
(2) Output Relays, (1) 12VDC Out

Buttons (1) Factory reset

Operating temperature 0 to 40° C (32 to 104° F)

Operating humidity 5 - 90% noncondensing

Certifications CE, FCC, IC

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.