


- UniFi Cloud Gateways
- WiFi
- Switching
- Cloud Keys & Gateways
- Camera Security
- Door Access
- Phone System
- New Integrations
- Accessories

Switching / EnterpriseXG 24

Datasheet

Installation Guide

Marketing Images

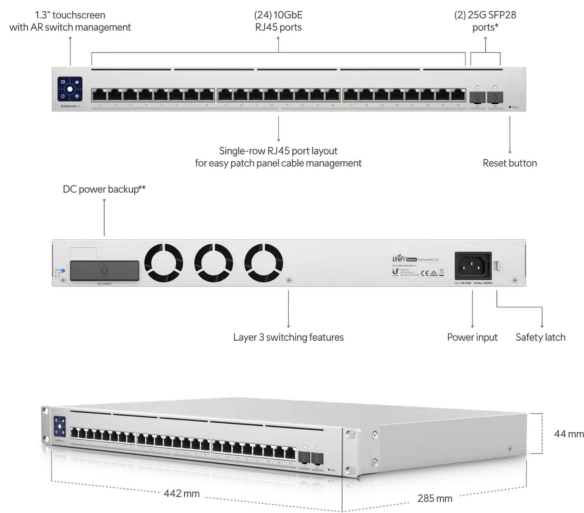

*The two SFP28 ports don't support mixed speed data 25Gbps mode. Once one of the SFP28 ports is configured to a 25Gbps mode, the others will be limited at 25Gbps too. The SFP28 ports only support mixed speed when all ports are at 1Gbps or 10Gbps.
 **Require UniFi Power Backup.

Mechanical

Dimensions	442 x 44 x 285 mm (17.4 x 1.7 x 11.2")
Weight	Without mounting brackets: 4.5 kg (9.9 lb) With mounting brackets: 4.6 kg (11 lb)
Enclosure material	SGCC steel

Hardware

Management interface	Ethernet In-Band
Networking interface	(24) 1/2.5/5/10 GbE ports
SFP28 interface	(2) 25G SFP28 ports* *The two SFP28 ports don't support mixed speed at 25 Gbps mode. Once one of the SFP28 ports is configured at 25 Gbps mode, the others will be limited at 25 Gbps too. The SFP28 ports only support mixed speed when all ports are at 1 Gbps or 10 Gbps.
Total non-blocking throughput	290 Gbps
Switching capacity	580 Gbps
Forwarding rate	431.52 Mpps
Power method	(1) Universal AC input, 100—240V AC, 2A Max., 50/60 Hz (1) USP-RPS DC input, 11.5V DC, 8.7A

Power supply	AC/DC, internal, 100W
Supported voltage range	100—240V AC
Max. power consumption	100W
Services	SMB Layer 3 GbE switch
ESD/EMP protection	Air: ± 16kV, contact: ± 12kV
LCM display	(1) 1.3" color touchscreen
Button	Factory reset
Operating temperature	-5 to 40° C (23 to 104° F)
Operating humidity	10 to 95% noncondensing
Certifications	CE, FCC, IC

LEDs

System	Status
Ethernet	Link/activity

Application Requirements

UniFi Network	Version 6.1.67 and later
----------------------	--------------------------

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.