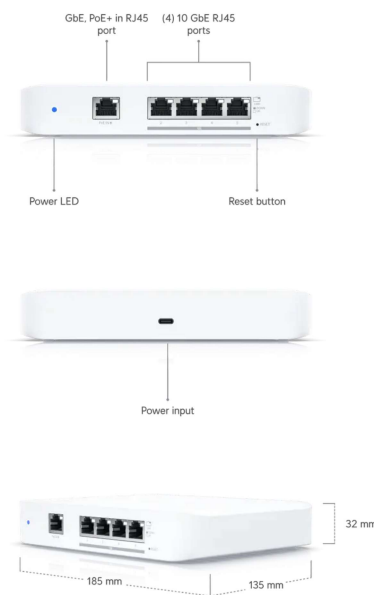


Tech Specs

UniFi UISP Branding

[UniFi Cloud Gateways](#)[WiFi](#)[Switching](#)[Cloud Keys & Gateways](#)[Camera Security](#)[Door Access](#)[Phone System](#)[New Integrations](#)[Accessories](#)[Switching](#) / Flex 10 GbE[Datasheet](#)[Installation Guide](#)[Marketing Images](#)**Mechanical**

Dimensions	135 x 185 x 32 mm (5.3 x 7.3 x 1.3")
Weight	1.2 kg (2.6 lb)
Enclosure material	Polycarbonate

Hardware

Management interface	Ethernet In-Band
Networking interface	(1) GbE, PoE+ RJ45 port (4) 10 GbE RJ45 ports
Total non-blocking throughput	41 Gbps
Switching capacity	82 Gbps
Forwarding rate	61,012 Mpps
Power method	(1) PoE+, 50—57V DC, 25W (1) USB Type-C, 5V DC, 5A
Power supply	PoE+ (Pins 1, 2+/3, 6- or 4, 5+/7, 8-) AC/DC power adapter, 5V DC, 5A, 1.5 m cord (Included)

Supported voltage range	90—264V AC (Adapter)
Max. power consumption	25W
ESD/EMP protection	Air: ± 16kV, contact: ± 12kV
Button	Factory reset
Operating temperature	-5 to 45° C (23 to 113° F)
Operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

LEDs

System	Status
Ethernet	Speed/link/activity

Application Requirements

UniFi Network	Version 6.1.67 and later
---------------	--------------------------

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.