

Tech Specs

UniFi UISP Branding


60 GHz Wireless Wireless Fiber Wired Accessory Tech

Wired / UISP Power

Datasheet

Installation Guide

Marketing Images

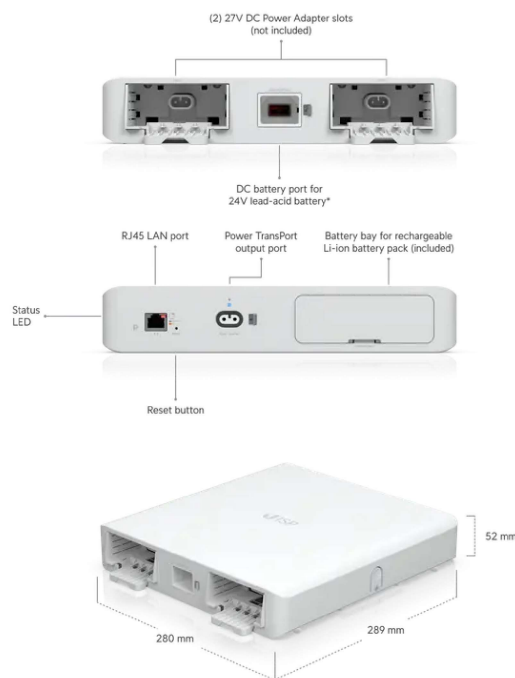

*Connect to a lead-acid battery only. Using another battery type could be hazardous.

Mechanical

Dimensions	289 x 280 x 52 mm (11.38 x 11.02 x 2.05")
Weight	1.4 kg (3.1 lb)
Enclosure materials	Polycarbonate, acrylonitrile butadiene styrene

Hardware

Networking interface	(1) 10/100 MbE RJ45 LAN port
Management interface	Ethernet In-band Bluetooth
Power TransPort output	27V DC, 100W (with 1 power adapter) 27V DC, 200W (with 2 power adapters)
Power method	(2) 27V DC, 4.4A power adapters (120W Power TransPort Adapter not included)
Backup power	(1) 25.2V DC, 7.93A rechargeable Li-ion battery pack (included) (1) 24V DC, 8.33A lead acid battery input* (battery not included)

*Connect to a lead-acid battery only. Using another battery type could be hazardous.

Max. power consumption	3W (excludes Power TransPort output and battery charger)
ESD/EMP protection	Air: ± 15 kV, contact: ± 8 kV
Operating temperature	-5 to 40° C (23 to 104° F)
Operating humidity	5 to 95% non-condensing
Certifications	CE, FCC, IC

LEDs

System	Status
RJ45 data port	Link/activity
Power TransPort	On/Off

Compatibility

Supported models	UISP Console UISP Router (installed with UISP Box) UISP Router Pro UISP Switch (installed with UISP Box) UISP Switch Pro
-------------------------	--

Software

Management application	UISP: Version 1.4.5 and later
-------------------------------	-------------------------------

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.