

Tech Specs

UniFi UIISP Branding

UniFi Cloud Gateways

WiFi

Switching

Cloud Keys & Gateways

Camera Security

Door Access

Phone System

New Integrations


Accessories

[Door Access](#) / Access Reader Lite

Datasheet

Installation Guide

Marketing Images

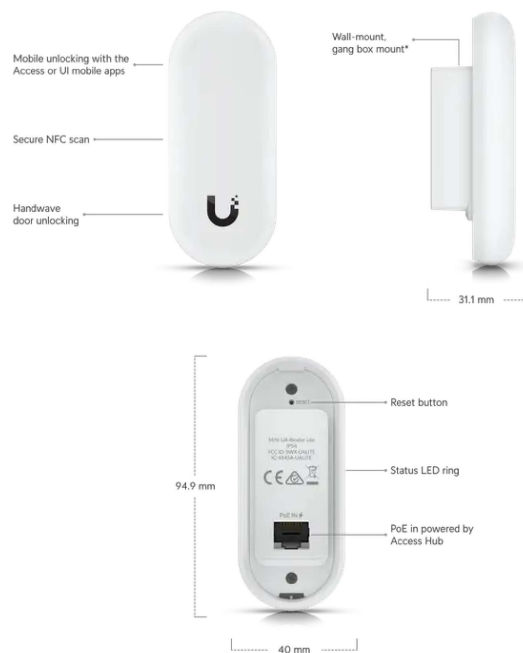

*The UA-Reader-Lite must be installed either indoors or under a roof eave outdoors.

Mechanical

Dimensions

94.91 x 40.00 x 31.10 mm (3.74 x 1.57 x 1.22")

Weight

67 g (2.36 oz)

Enclosure material

Polycarbonate

Mounting options*

Wall-mount, gang box mount*

*The UA-Reader Lite must be installed either indoors or under a roof eave outdoors.

Weatherproofing

IP54

Hardware

Networking interface

10/100 MbE

Max. power consumption

6W

Power method

PoE

Button

(1) Factory reset

LEDs	White/Blue
Connectivity	Ethernet, BLE 4.1
NFC frequency	13.56 MHz
NFC reading range	<30 mm
NFC standards	ISO 14443A, 14443B, 15693
NFC technology	NFC Tag 1, 2, 3, 4, 5 MIFARE Classic MIFARE Plus MIFARE Ultralight MIFARE DESFire
Operating temperature	-20 to 40° C (-4 to 104° F)
Operating humidity	5 to 90% noncondensing
Certifications	CE, FCC, IC

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.