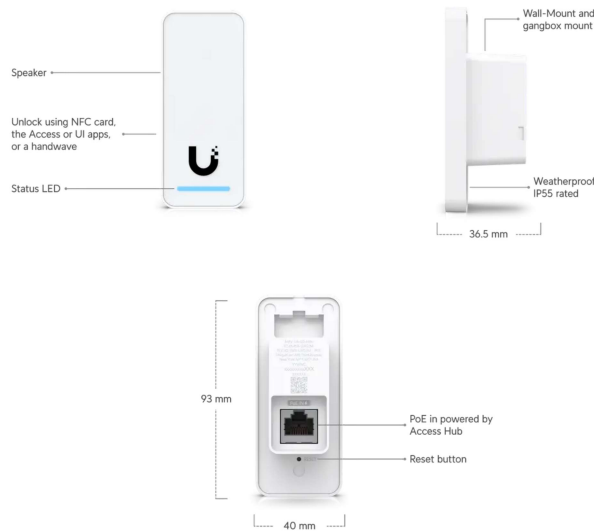


Tech Specs

UniFi UISP Branding

[UniFi Cloud Gateways](#)[WiFi](#)[Switching](#)[Cloud Keys & Gateways](#)[Camera Security](#)[Door Access](#)[Phone System](#)[New Integrations](#)[Accessories](#)[Door Access](#) / [Access Reader G2](#)[Datasheet](#)[Installation Guide](#)[Marketing Images](#)**Mechanical**

Dimensions	93 x 40 x 36.5 mm (3.7 x 1.6 x 1.4")
Weight	82 g (2.9 oz)
Enclosure material	Polycarbonate, glass
Mounting	In wall, gang box
Weatherproofing	IP55

Hardware

Networking interface	(1) 10/100 MbE RJ45 port
Connectivity	BLE 4.1
Power method	PoE
Supported voltage range	48V DC
Max. power consumption	5W
ESD/EMP protection	Air: ±15kV, contact: ±8kV
Sensors	Proximity sensor
Speaker	(1) 8 ohm, 0.7W

LEDs	R/G/B/W
Button	(1) Factory-reset
NFC frequency	13.56 MHz
NFC read range	< 30 mm
NFC standards	ISO 14443A, 14443B, 15693
NFC technology	NFC Tag 1,2,3,4,5 MIFARE Classic MIFAREPlus MIFARE Ultralight MIFARE DESFire
Operating temperature	-30 to 45° C (-22 to 113° F)
Operating humidity	5 to 90% noncondensing
Certifications	CE, FCC, IC

Software

Management application UniFi Access: Version 1.5.9 and later

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2023 Ubiquiti, Inc. All rights reserved.