

## **Tech Specs**

UniFi UISP Branding

UniFi Cloud Gateways WiFi Switching Cloud Keys & Gateways Camera Security Door Access Phone System New Integrations Accessories

## Camera Security > Al Theta Pro Long-Distance Lens

Datasheet Installation Guide Marketing Images



## Mechanical

**Dimensions** Ø36.6 x 58.9 mm (Ø1.4 x 2.3")

**Weight** 60 g (2.1 oz)

Enclosure materials Aluminum alloy, polycarbonate

 Mounting material
 Polycarbonate

 Weatherproofing
 Indoor only

**Optics** 

 Sensor
 8MP 1/1.8" sensor

 Lens
 Fixed focal length

 View angle
 H: 53°(H), V: 31°, D: 60°

Video

Video compression H.264

**Resolution** 8MP 3840 x 2160 (16:9)

Max. frame rate 24 FPS

Image settings Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay

System

Power method Theta proprietary

Power supply 5V DC, 0.5A

Max. power consumption 2.5W


Mounting Wall, ceiling mount (Included)

Angle mount (Sold separately)

Operating temperature 0 to 40° C (32 to 104° F)

Operating humidity 10 to 90% noncondensing

**Certifications** FCC, IC, CE

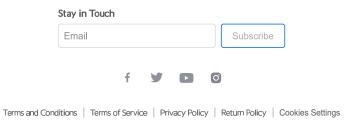

© 2024 Ubiquiti, Inc. All rights reserved.