

Tech Specs

UniFi UISP Branding

UniFi Cloud Gateways WiFi Switching Cloud Keys & Gateways Camera Security Door Access Managed VoIP New Integrations Accessories



Camera Security > G5 Turret Ultra

Datasheet

In The Box

Marketing Images

Installation Guide

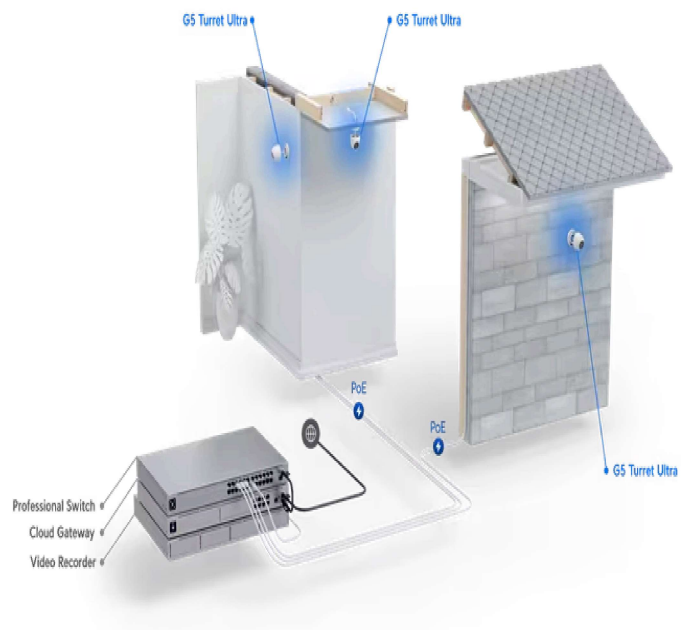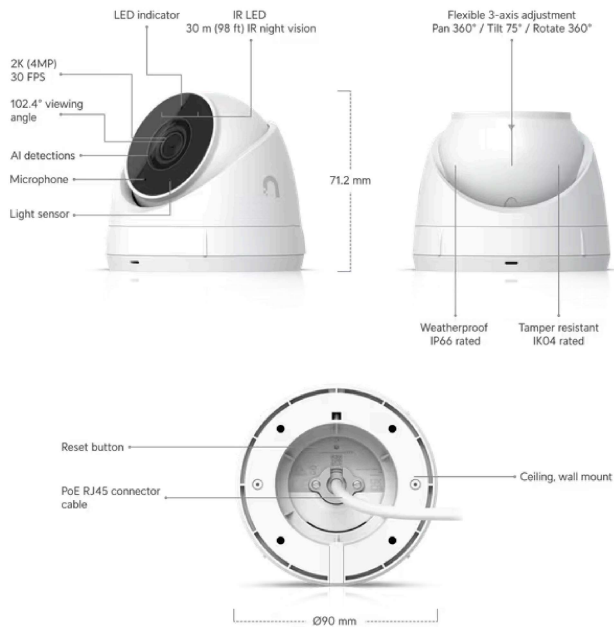

Mechanical

Dimensions	Ø90 x 71.2 mm (Ø3.5 x 2.8")
Weight	330 g (11.6 oz)
Enclosure material	Aluminum alloy, UV-stabilized polycarbonate
Weatherproofing	IP66
Resistance	IK04
Cable jacket enclosure dimensions	Ø20 x 70.6 mm (0.8 x 2.8")
Cable jacket enclosure materials	Thermoplastic elastomer, polycarbonate, silicone rubber
Cable length	30 cm (1 ft)
Cable diameter	5 mm (0.2")
Cable jacket material	Polycarbonate
Cable connector type	RJ45

Optics

Sensor	1/2.4" CMOS
Lens	Fixed focal length
View angle	H: 102.4°, V: 54.9°, D: 120.6°

Night mode Built-in IR LED illumination and IR cut filter

Video

Resolution 4MP 2688 x 1512 (16:9)

Max. frame rate 30 FPS

Image settings Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay

System

Processor Dual-core Arm® Cortex®-A7 based chip

Networking interface 10/100 MbE RJ45 port

Max. power consumption 4W

Power method PoE

Supported voltage range 37-57V DC

LED R/G/B/W

Button Factory reset

Mounting Surface mount

Ambient operating temperature -30 to 50° C (-22 to 122° F)

Ambient operating humidity 0 to 90% noncondensing

Certifications FCC, IC, CE

Audio

Microphone Yes (Can be disabled)

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.